

NEW!



MOBILE HOME ELECTRIC

6-Year Limited Tank/Parts Warranty*

These electric water heaters are designed for modular housing applications. Available in 5 sizes to fit various applications; 28-gallon lowboy for limited height spaces, a 30-gallon tall model to fit narrow spaces and a 40-gallon regular model for unrestricted space when additional capacity is required.

- **Dual Heating Elements**
Screw-in, direct immersion, 3500 watt, 240 volt heating elements for maximum efficiency
- **2 Inch Non-CFC Foam Insulation**
Reduces Standby heat loss
- **CSA Certified and ASME Rated T&P Relief Valve**
Conveniently located on the side of the tank to facilitate piping to a drain or external to the building
- **Side Water Connections**
For ease of installation in Mobile Home Applications (except for 19 and 50 gallon models)
- **Anode Rod**
Top-mounted, heavy-duty anode for added tank protection, extending the life of the tank
- **Built-In Electric Junction Box**
Top-located, convient junction box, ready for 1/2" or 3/4" conduit
- **Thermostat / High Limit Control**
Combination control allows adjustment of water temperature while providing overheat protection
- **Durable, Brass Drain Valve**
- **Code Approvals**
Listed to UL 174. Meets HUD mobile home installation and BOCA Codes. Meets the standby loss requirements of the U. S. Department of Energy and current edition of ASHRAE/IESNA 90.1 and the Federal Energy Efficiency Standards effective January 20, 2004, according to the National Appliance Energy Conservation Act (NAECA) of 1992. All models are certified at 300 PSI test pressure and 150 PSI working pressure.



*For complete warranty information consult the written warranty of American Water Heater found at www.americanwaterheater.com or call (800.999.9515)



MOBILE HOME ELECTRIC

6-Year Limited Tank/Parts Warranty*

These electric water heaters are designed for modular housing applications. Available in 5 sizes to fit various applications; 28-gallon lowboy for limited height spaces, a 30-gallon tall model to fit narrow spaces and a 40-gallon regular model for unrestricted space when additional capacity is required.

- **Dual Heating Elements**
Screw-in, direct immersion, 3500 watt, 240 volt heating elements for maximum efficiency
- **2 Inch Non-CFC Foam Insulation**
Reduces Standby heat loss
- **CSA Certified and ASME Rated T&P Relief Valve**
Conveniently located on the side of the tank to facilitate piping to a drain or external to the building
- **Side Water Connections**
For ease of installation in Mobile Home Applications (except for 19 and 50 gallon models)
- **Anode Rod**
Top-mounted, heavy-duty anode for added tank protection, extending the life of the tank
- **Built-In Electric Junction Box**
Top-located, convient junction box, ready for 1/2" or 3/4" conduit
- **Thermostat / High Limit Control**
Combination control allows adjustment of water temperature while providing overheat protection
- **Durable, Brass Drain Valve**
- **Code Approvals**
Listed to UL 174. Meets HUD mobile home installation and BOCA Codes. Meets the standby loss requirements of the U. S. Department of Energy and current edition of ASHRAE/IESNA 90.1 and the Federal Energy Efficiency Standards effective January 20, 2004, according to the National Appliance Energy Conservation Act (NAECA) of 1992. All models are certified at 300 PSI test pressure and 150 PSI working pressure.



Low Lead Content



*For complete warranty information consult the written warranty of American Water Heater found at www.americanwaterheater.com or call (800.999.9515)

Contact us at 800.945.4440

Product Availability, Prices and Specifications Subject to Change without Notice

NEW!



RESIDENTIAL GAS MOBILE HOME FVIR ATMOSPHERIC 6-Year Limited Tank/Parts Warranty*

The mobile home atmospheric models are equipped with FVIR technology, which reduces the risk of accidental fires involving flammable vapors from products such as gasoline, paint thinner, and solvents.


- **Convertible Gas Control For Natural or Propane Gas**
For flexibility to meet the needs of different mobile home installations. Shipped for Propane applications; may be field converted to natural gas
- **Efficient and Quiet Burners**
Multiport burners for even flame distribution, quiet operation, and high-efficiency. Stainless steel burner for propane applications; aluminized steel burner for natural gas meets Low NOx requirements
- **Combination Thermostat/ECO**
With factory-preset pressure regulator and built-in millivolt-powered energy cut-off for overheat protection
- **Piezo Electric Igniter**
For lighting the pilot without matches
- **Resettable Thermal Switch**
- **Fused Ceramic Shield Tank**
For long-lasting protection against rust and corrosion
- **T&P Valve**
Conveniently located on the side of the tank to facilitate piping to a drain or external to the building
- **1/2" Gas Connection, 3/4" Top Water Connections**
- **Anode Rod**
Top-mounted, heavy-duty anode for added tank protection, extending the life of the tank
- **Drain Valve**
Child-resistant, corrosion-resistant drain valve
- **Code Approvals**
CSA International (formerly AGA) ANSI Z21.10.1 – CSA 4.1 (current edition). HUD approved for mobile home installation; CEC and 1987 NAECA current requirements. All models are certified at 300 PSI test pressure and 150 PSI working pressure



*For complete warranty information consult the written warranty of American Water Heater found at www.americanwaterheater.com or call (800.999.9515)



RESIDENTIAL GAS MOBILE HOME FVIR ATMOSPHERIC
6-Year Limited Tank/Parts Warranty*

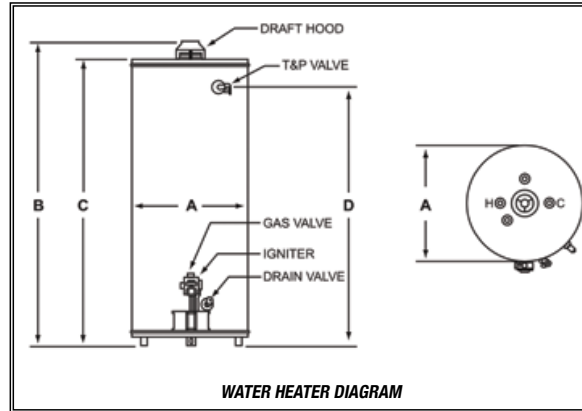

WATER HEATER MODEL NUMBER	MANUFACTURES MODEL NUMBER	GALLON CAPACITY	INPUT BTU PER HOUR		GPH RECOVERY 90° RISE		VENT DIAM.	ENERGY FACTOR (EF)	JACKET DIAM.	HEIGHT TO TOP OF HEATER (INCHES)	HEIGHT TO SIDE T&P (INCHES)	APPROX. SHIPPING WEIGHT (LBS)
			NAT.	LP	NAT.	LP						
56020001	MFG61-30T-303PV	30	30,000	29,000	30.4	29.4	3	0.61	16	56-1/2	49-1/2	98
56020002	MFG61-40T-403PV	40	40,000	36,000	40.5	36.5	3	0.59	18	58-3/4	51-3/4	127

Above models are shipped propane, and may be field converted to natural gas. For high altitude please specify. Low NOx certified. All units have 3/4" top water connections, 1/2" gas connection. Dimensions and specifications subject to change without notice in accordance with our policy of continuous product improvement. Dimensions on all charts shown in inches.



ROOF JACK-ATMOSPHERIC

ACCESSORY MODEL NUMBER	MANUFACTURES MODEL NUMBER	DESCRIPTION
56030001	9007942005	ROOF STACK-ATMOSPHERIC 12" ROOF CAVITY
56030002	9007941005	ROOF STACK-ATMOSPHERIC 12-30" ROOF CAVITY
56030003	9002588005	OUTDOOR ROOF EXTENSION 18" EXT.

*For complete warranty information consult the written warranty of American Water Heater found at www.americanwaterheater.com or call (800.999.9515)



Style Crest, Inc.
 2450 Enterprise St.
 Fremont, Ohio 43420
 800.945.4440
www.stylecrestproducts.com

Printed in U.S.A. © Copyright 307156023 WATER HEATER-GAS-AT-2PAGE

Contact us at 800.945.4440

NEW!



MOBILE HOME SEALED COMBUSTION

6-Year Limited Tank/Parts Warranty*

The Mobile Home Sealed Combustion unit vents Thru-the-Roof. The bottom intake air vent can be horizontally ducted for up to 30 feet with the purchase of an optional ducted air inlet kit (part #56030009). The intake kit includes a 45° rodent-proof termination cap and wall collars.

- **Convertible Gas Control**
Gas control convertible for natural or propane gas, providing for flexible installations in manufactured housing
- **Fused Ceramic Shield Tank**
A tough, thick, durable coat of blue ceramic is fused to the tank's interior surfaces at 1600°F, forming a corrosion-resistant lining for years of dependable protection and use
- **Non-CFC Foam Insulation**
The tank is surrounded by a thick coat of non-CFC polyurethane foam to trap heat inside the tank, saving energy
- **T&P Valve**
Conveniently located on the side of the tank to facilitate piping to a drain or external to the building. Also available with top T&P opening for field installation
- **3/4" Top Water Connections**
Side cold water inlet and top hot water outlet
- **1/2" Gas Connection**
- **Aluminized Steel Multiport Burner**
For even flame distribution, quiet operation and high-efficiency combustion. All models use standing pilot light for ignition
- **Combination Thermostat/ECO**
With factory-preset pressure regulator and built-in millivolt-powered energy cutoff for overheat protection
- **Anode Rod**
Top-mounted, heavy-duty anode for added tank protection, extending the life of the tank
- **Code Approvals**
CSA International certified. Meets California code approvals for NOx emissions
- **Drain Valve**
Non-metallic, corrosion-resistant drain valve




*For complete warranty information consult the written warranty of American Water Heater found at www.americanwaterheater.com or call (800.999.9515)




MOBILE HOME SEALED COMBUSTION

6-Year Limited Tank/Parts Warranty*

This water heater is of the sealed combustion type (direct vent) where all the combustion air is supplied from the outdoors through the air intake and all combusted gas products are vented directly to the outside by means of the roof jack. No draft diverter (vent hood) is required for this water heater. The water heater must be installed in accordance with the Federal Mobile Home Construction and Safety Standard for Mobile Homes (ANSI/NFPA No. 501-B1977). Design evaluated in accordance with H.U.D. manufactured home construction and safety standard, title CFR, Part 3280.707(d)(2) for energy efficiency. Includes convertible control, steel burner for natural and LP gas.

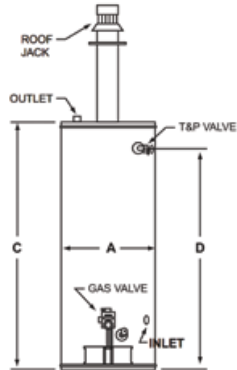

WATER HEATER DIAGRAM

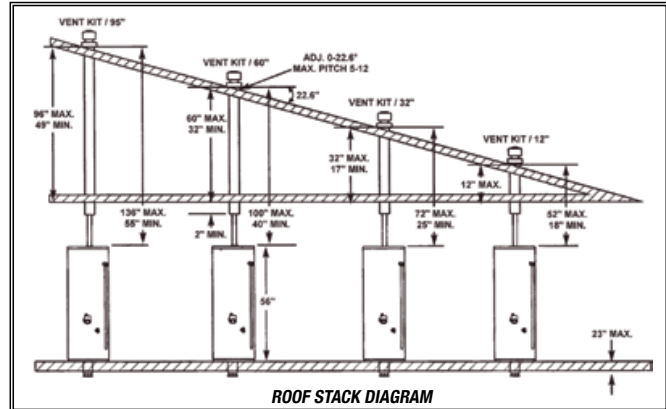

ROOF STACK DIAGRAM

WATER HEATER MODEL NUMBER	MANUFACTURES MODEL NUMBER	GALLON CAPACITY	INPUT BTU PER HOUR		GPH RECOVERY 90° RISE		VENT DIAM.	ENERGY FACTOR (EF)	JACKET DIAM.	HEIGHT TO TOP OF HEATER (INCHES)	HEIGHT TO SIDE T&P (INCHES)	APPROX. SHIPPING WEIGHT (LBS)
			NAT.	LP	NAT.	LP						
56020004	MHSCG-62-30T30-3NV	30	30,000	30,000	31.0	31.0	N/A	0.61	18	56"	51-1/2"	119
56020005	MHSCG-62-40T32-3NV	40	32,000	32,000	33.0	33.0	N/A	0.59	20	56-1/2"	51"	136


Dimensions and specifications subject to change without notice in accordance with our policy of continuous product improvement. Dimensions on all charts shown in inches. All models are wired for non-simultaneous element operation. 3/4" water connections. Available with side T&P only.



ROOF JACK-DIRECT VENT



AIR INLET KIT-DIRECT VENT BASEMENT/CRAWL



ACCESSORY MODEL NUMBER	MANUFACTURES MODEL NUMBER	DESCRIPTION
56030005	9002964005	ROOF STACK-DIRECT VENT 12"
56030006	9002965005	ROOF STACK-DIRECT VENT 12-32"
56030007	9002966005	ROOF STACK-DIRECT VENT 32-60"
56030008	9002967005	ROOF STACK-DIRECT VENT 60-95"
56030003	9002588005	OUTDOOR VENT EXTENSION 18"
56030009	9002968005	AIR INLET KIT-DIRECT VENT-BASEMENTY/CRAWL

*For complete warranty information consult the written warranty of American Water Heater found at www.americanwaterheater.com or call (800.999.9515)



Style Crest, Inc.
2450 Enterprise St.
Fremont, Ohio 43420
800.945.4440
www.stylecrestproducts.com

Printed in U.S.A. © Copyright 307156033 WATER HEATER-GAS-DV-2PAGE